


NOTES:

1. SOURCE FOR DIMENSIONS AND SECTIONAL PROPERTIES IS MEEVER USA.
2. SOURCE FOR THE MATERIAL SPECIFICATIONS IS MEEVER USA.
3. MATERIAL: COLD ROLLED SHEET PILE GRADE 50 KSI
 MINIMUM YIELD: 50183 PSI (346 MPA)
 MINIMUM ULTIMATE TENSILE 59521 PSI (424 MPA)

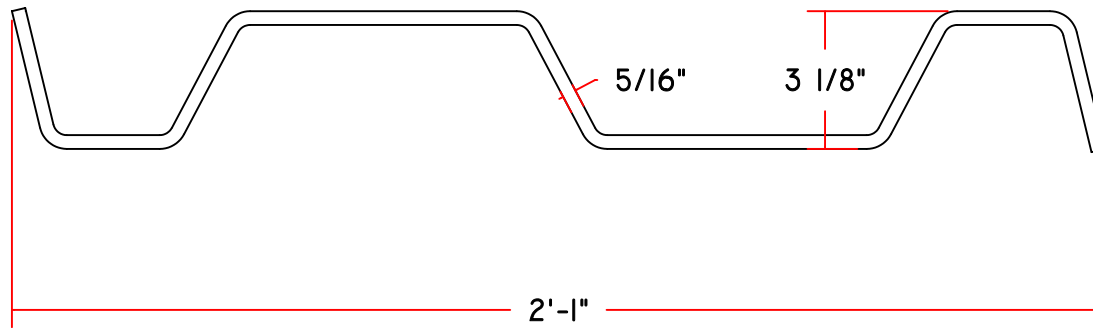

PROPERTIES - SHEET PILE KD VI/8 (by MEEVER USA)	
WEIGHT	33.6 LB / FT
WIDTH	23.62 IN
AREA OF SECTION	5.01 SQ. IN. / FT
MOMENT OF INERTIA	7.1 IN ⁴ / FT
SECTION MODULUS	4.5 IN ³ / FT
RADIUS OF GYRATION	1.19 IN
ALLOWABLE BENDING MOMENT (SHORT TERM)	14,625 LB x FT

PRIMAX SHORING, INC.

PO BOX 338, PATTESRON, CA 95363
 TEL: 209-862-3722 FAX: 209-892-4565

PREP. **M. KADIU** DWG. **1/1**

TITLE

SHEET PILE KD VI/8

PROJECT #

SCALE